


Deep Tek Subsea Hydraulic Shear



General information:

The Hydraulic Shear is a versatile tool capable of performing fast and efficient scrap cuts on a variety of different grade metals of varying size and thickness. The tool can be hung in either the horizontal or vertical positions from the lifting points allowing for access in the most challenging of situations. The Hydraulic Shear is provided with Hotstab flying lead and ROV receptacle, spare blades, hoses and a lifting harness.

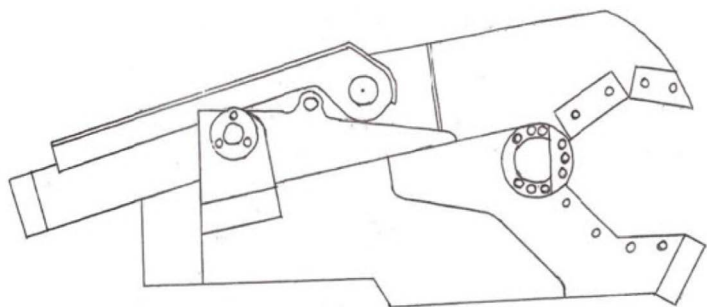

TECHNICAL SPECIFICATIONS

Shear force	800t
Maximum pressure	210 Bar
Max flow rate	150 lpm
Weight	5t
Hydraulic interface	1/2" BSP

Jaw opening	480mm
Jaw depth	550mm
Open / close cycles	4min
SWL	20t

Dimensions open

L—3150mm x W—1300mm x H—1600mm



NOTE: Package configuration subject to change and will be customised for individual projects

1st Floor Tudor House
Le Bordage, St Peter Port
GY1 1DB, Guernsey

E: operations@magellan.gg
www.magellan.gg